JMS AG

Jet Maintenance & Service Rainer-Haungs-Strasse 42 77933 Lahr/Germany Phone +49 (7821) 9 94 69 – 0 Fax +49 (7821) 9 94 69 – 100




Internet: http://www.jms.aero/
eMail: mailto:sales@jms.aero


HRB 705130 Amtsgericht Freiburg i.Br. VAT Reg No/USt.-IdNr.: DE270217003


Doc. No. TDS J-CART-8BN-Booster R00.docx

Datasheet:

p/n: J-CART-8BN-BOOSTER

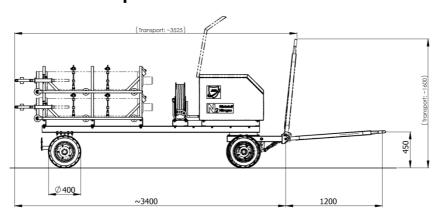





Description:

Nitrogen service cart for aircraft tire/shock-strut servicing. Allows safe and easy carrying of eight (8) nitrogen bottles for onsite-service. Nitrogen system consists of one low-pressure (LP) circuit for aircraft tire inflation servicing and one high-pressure (HP) circuit for shock-strut/oleo servicing.

Standard features/including:

- Trailer/steel frame with tow bar, Diam. 2"/50mm tow-eye, four air-inflated tires
- Frame hot-dip galvanized
- Storage rack for qty. 8 standard N₂ bottles, V=50 I, p=200 bar/2900 psi
- LP circuit with gauges and pressure regulator adjustable from 0-35 bar (0-507 psi), stop valve and spring-retracted hose drum, carrying a 12 m LP-hose
- HP circuit with booster and pressure regulator, adjustable from 2-275 bar (29-3988 psi), stop valve and springretracted hose drum, carrying a 12 m HP-hose

Shipping dimensions incl. packing:

Approx. Weight	Approx. shipping Dim.	Approx. Volume
[kg]	[mm]	[m³]
560	3525 x 1170 x 1300	5,36
[lbs]	[inch]	[ft³]
1234	139 x 46 x 51	189,3

Options (at extra charges):

- Puncture-proof tires
 - → Option R4
- Nitrogen bottle, p=200 bar, V=50 l incl. valve
 - → J-CART-BOTTLE-N2
- Aircraft tire inflator gun, complete with connector set for small and large bore aircraft tire valves
 - → J-TIREGUN
- Bottle adapter for country specific gas bottles
 - → J-Adapter-Nxx
- Nitrogen filling adapter (see. separate datasheet)
 - → W-7300xx
 - Protective canopy
 - → J-CANOPY
 - Supply pressure gauge with calibration certificate i.a.w. DKD

Documentation:

- Technical manual incl. illustrated spare parts list
- COC Certificate of Conformity

Net weight (without options):

550 kg/1212 lbs