

JMS AG

Rainer-Haungs-Straße 42
77933 Lahr/Germany

URL: <http://www.jms.aero/>
E-Mail: sales@jms.aero

**J-POD10SA02**

Doc. No.: TDS J-POD10SA02_R01.docx

Datasheet J-POD-series**Standard features:**

- Tripod steel frame
- Hydraulic lift cylinder (single stage) with corrosion-protected/coated cylinder bore and piston
- Manual safety-locknut
- Interchangeable spherical jacking adapter, R3/4" concave
- Manually height adjustable foot pads
- Spring-loaded heavy-duty castors with locks
- Hydraulic steel tank incl. oil level (sight glass)
- Dual stage hand pump (LP/HP)
- Electrically driven hydraulic pump
- 2K-PU SKYDROL-resistant paint
- Standard color RAL 1007 (daffodil yellow)

Options available:



- Mechanical indicator for lifting height
→ Option J-POD-SA-MI
- Pneumatic driven hydraulic pump
→ Option J-POD-AD
- Tow-bar with \varnothing 76,2mm / 3" tow-eye
→ Option J-POD-SA-TB76
- Customized color in accordance with RAL color coding scheme
→ Option J-POD-RAL

Documentation:

- Operation & maintenance manual incl. illustrated spare parts list
- Proof load test certificate
- COC (Certificate of Conformity)
- CE Declaration of Conformity

Aircraft application:

BOEING 737-100 through -900, BBJ, -MAX
TAIL

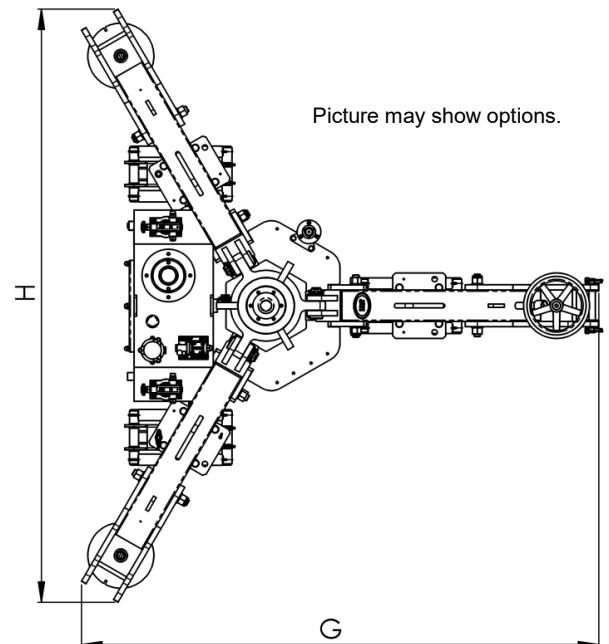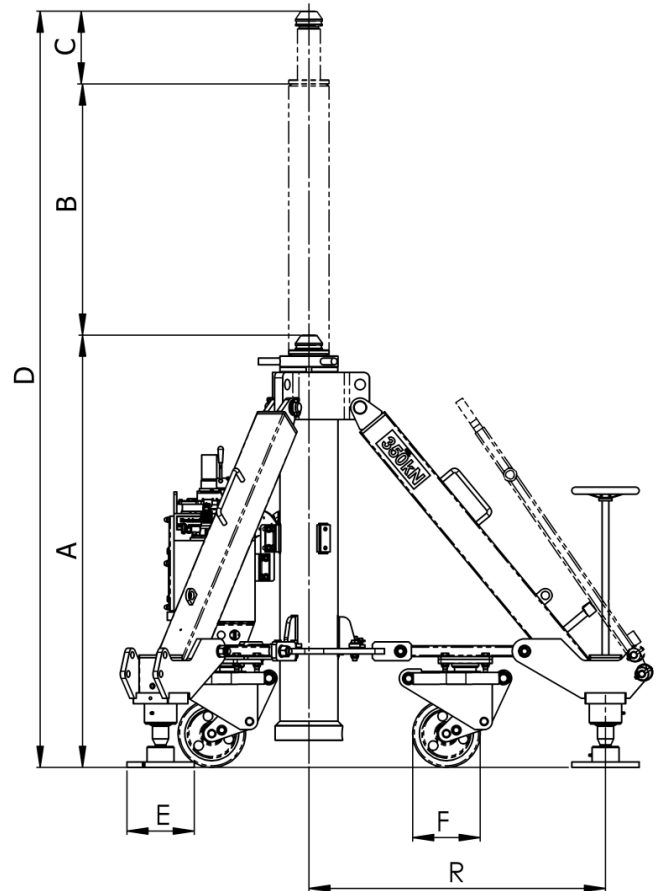

Capacity	A Min. height	B Hydr. Lift	C Screw Ext.	D Max. height	E	F	G	H	R
[t] 10	[mm] 2500	[mm] 850	[mm] 300	[mm] 3650	[mm] 250	[mm] 250	[mm] 1900	[mm] 2155	[mm] 1100
[tn sh.] 11.0	[inch] 98.4	[inch] 33.5	[inch] 11.8	[inch] 143.7	[inch] 9.8	[inch] 9.8	[inch] 74.8	[inch] 84.8	[inch] 43.3

Packing information on request.

We reserve the right to update this datasheet at any time w/o prior notice!