

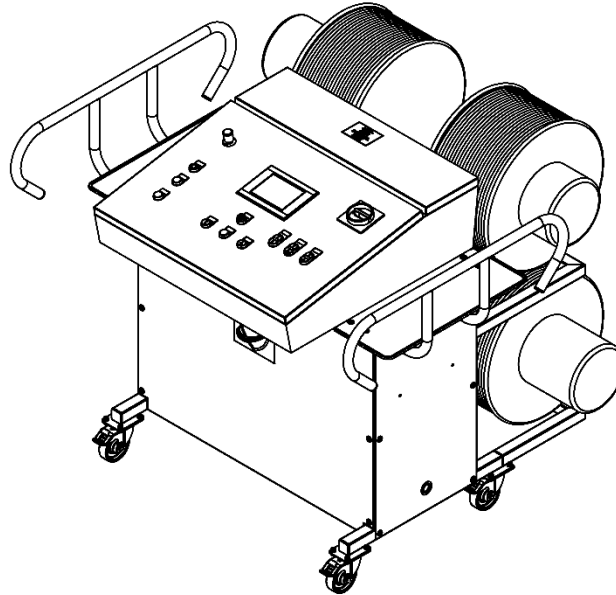
JMS AG

Rainer-Haungs-Straße 42
77933 Lahr/Germany

URL: <http://www.jms.aero/>
E-Mail: sales@jms.aero

**J-SLS-X**

Doc. No.: TDS J-SLS-X_R02.docx

Datasheet J-SLS-X

Picture may show options

Function:

Enables synchronized movement and control of all three main tripod jacks (lifting and lowering) from a centralized position. For safe lifting and lowering speeds of up to 200 mm/min.

Technical data/including:

- Control desk including all relevant MMI switches and control elements, readily mounted on steel frame with castors (lockable); control desk including electrical cabinet designed for indoor use, IP55
- Canvas-type cover
- Includes EATON PLC-controller, type EASY/Touchpanel including control software for JMS tripod jacks J-POD-X series
- Data-signal cables for tripod jack control, 35m length each
- Centralised power supply for control desk and jacks, 3-phase AC400V/50Hz
- Desk/cabinets powder-coated, color: light grey (RAL 7035)

Options (at extra charges):

- 4x Powersupply via spring loaded cable winders
→ Option J-SLS-X3-KT (3xJacks / 1xStay)
- 5x Power supply via spring loaded cable winder
→ Option J-SLS-X3.1-KT (4xJacks)

Documentation:

- Technical manual
incl. illustrated spare parts list
- COC Certificate of Conformity
- CE Declaration of Conformity

Net weight: 145 kg/298 lbs

Dimensions: