Phone: +49 (7821) 9 94 69 - 0 Fax: +49 (7821) 9 94 69 - 100





Internet: <a href="www.jms.aero">www.jms.aero</a>
E-Mail: <a href="sales@jms.aero">sales@jms.aero</a>

TDS\_J-TOW170\_R08.docx

Page 1 of 1

# **J-TOW170**

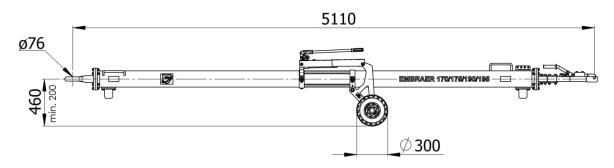

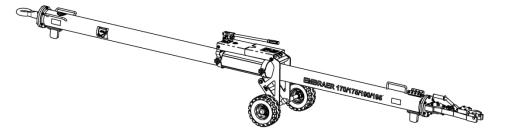

# **Standard features:**

- 1xPush/Pull and 1xTorque shear pin mounted (add. as spare parts incl.: 2xPush/Pull and 2xTorque shear pins)
- 1xRetaining pin
- Air-inflated tires
- Hydraulically height adjustable (split axle) undercarriage
- Steel tube
- Skydrol resistant paint
- Standard colors: yellow RAL 1007 (tube), black RAL 9004 (undercarriage)

## **Net weight:**

221 kg / 487 lbs

# Aircraft application: )1

- Embraer 170 / 175
- Embraer 190 SU/STD/LR/LU/AR/ECJ\*
- Embraer 195 SU/LU/STD/LR/AR\*
- Lineage 1000
  - \*(Note: does not fit E2 models)

# Shipping dimensions incl. packaging:

Approx. Weight	Approx. shipping Dims	Approx. Volume
[kg]	[mm]	[m³]
<b>337</b>	<b>5225</b> x <b>1050</b> x <b>965</b>	<b>5,3</b>
[lbs]	[inch]	[ft³]
<b>743</b>	<b>206</b> x <b>41</b> x <b>38</b>	<b>187</b>

# Options (at extra charges):

- Puncture-proof (full rubber) tires
  - → Option R3
- Revolving tow-eye with shock absorber
  - → Option BA
- Revolving tow eye
  - → Option BP
- Customized color for towbar tube i.a.w. RAL coding scheme
  - → Option B-RAL

## **Documentation:**

- Technical manual incl. illustrated spare parts list
- COC Certificate of Conformity
- CE Declaration of Conformity (if applicable)

## Shear pins / Retaining pin:

- 00.36910.0012 "D" Push/Pull
- 00.36910.0013 "E" Torque
- 20-00020-0020-21 "D1-FB" Retaining pin

© JMS AG | We reserve the right to update this datasheet at any time without prior notice!