Phone: +49 (7821) 9 94 69 - 0 Fax: +49 (7821) 9 94 69 - 100





Internet: www.jms.aero
E-Mail: sales@jms.aero

TDS_J-TOW18_R00.docx

Page 1 of 1

J-TOW18

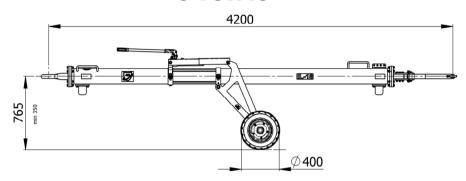

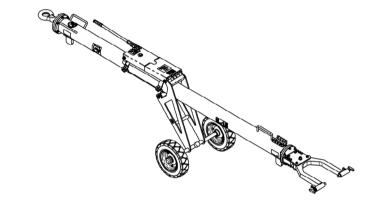

Standard features:

- Air-inflated tires
- Hydraulically height adjustable undercarriage
- Steel tube
- Skydrol resistant paint
- Standard colors: yellow RAL 1007 (tube), black RAL 9004 (undercarriage)

Net weight:

200 kg / 441 lbs

Aircraft application:

- IL-18
- IL-38

Options (at extra charges):

- Puncture-proof (full rubber) tires
 - → Option R4
- Revolving tow head ± 10°
 - → Option BD
- Revolving tow-eye with shock absorber
 - → Option BA
- Revolving tow eye
 - → Option BP
- Customized color for towbar tube i.a.w.
 RAL coding scheme
 - → Option B-RAL

Documentation:

- Technical manual incl. illustrated spare parts list
- COC Certificate of Conformity
- CE Declaration of Conformity (if applicable)

Shipping dimensions incl. packaging:

Approx.	Approx. shipping Dims	Approx.
Weight	l x w x h	Volume
[kg]	[mm]	[m³]
316	4300 × 1050 × 965	4,4
[lbs]	[inch]	[ft³]
697	169 x 41 x 38	155