


J-TOW320

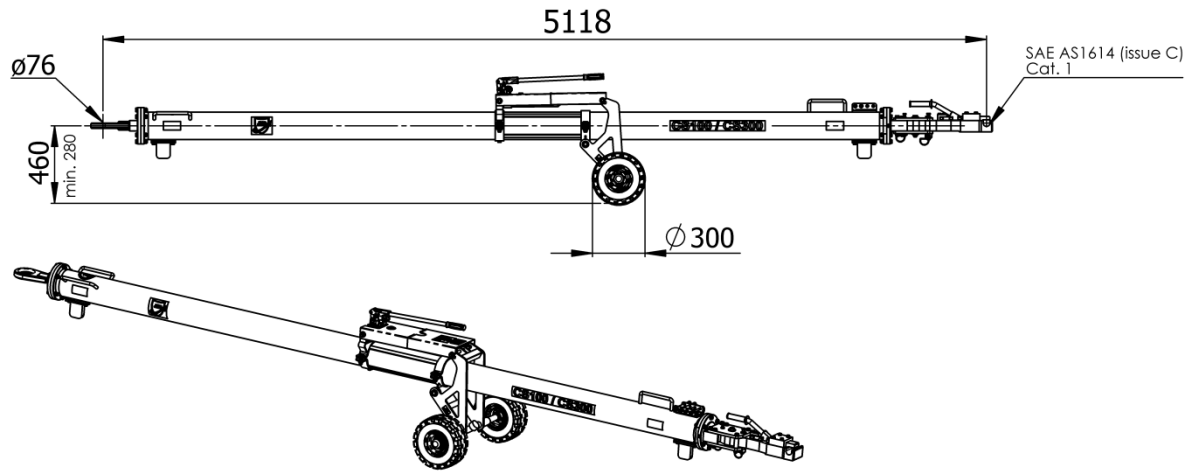

Standard features:

- 1xPush/Pull and 1xTorque shear pin mounted, replaceable without using tools (add. as spare parts incl.: 2xPush/Pull and 2xTorque shear pins)
- 1xRetaining pin, replaceable without using tools
- FOD-Protection device:
No shear pin debris will be lost in case of shear pin fracture!
- Automatic locking mechanism
- Air-inflated tires
- Hydraulically height adjustable undercarriage
- Revolving tow head $\pm 10^\circ$
(required due to NLG at an angle)
- Steel tube
- Skydrol resistant paint
- Standard colors: yellow RAL 1007
black RAL 9004 (undercarriage)

Net weight:

- 232 kg / 511 lbs

Aircraft application:

- A318/A319/A320/A321 + neo, ACJ, Elite

Shipping dimensions incl. packaging:

Approx. Weight	Approx. shipping Dims l x w x h	Approx. Volume
[kg]	[mm]	[m ³]
348	5320 x 1050 x 965	5,4
[lbs]	[inch]	[ft ³]
767	209 x 41 x 38	191

Options (at extra charges):

- Puncture-proof (full rubber) tires
➔ Option R3
- Floating Axle
➔ Option BV
- Revolving tow-eye with shock absorber
➔ Option BA (recommended as per AIRBUS Ground Towing Requirements)
- Revolving tow eye
➔ Option BP
- Customized color for towbar tube i.a.w. RAL coding scheme
➔ Option B-RAL

Documentation:

- Technical manual incl. illustrated spare parts list
- COC Certificate of Conformity
- CE Declaration of Conformity (if applicable)

Shear pins / Retaining pin:

- 20-01100-0020-022 "A2" Push/Pull
- 20-00730-0020-022 "A1" Torque
- 20-01070-0020-021 "A1-FB" Retaining pin