Phone: +49 (7821) 9 94 69 - 0 Fax: +49 (7821) 9 94 69 - 100




Internet: www.jms.aero
E-Mail: sales@jms.aero

TDS_J-TOWatr_R01.docx

Page 1 of 1

J-TOWatr

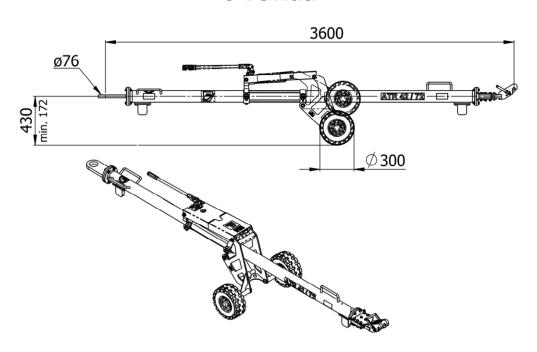

Standard features:

- Push/Pull and torque shear pin
- 2 spare shear pins included
- Retaining pin
- Air-inflated tires
- Hydraulically height adjustable undercarriage
- Steel tube
- Skydrol resistant paint
- Standard colors: yellow RAL 1007 (tube), black RAL 9004 (undercarriage)

Net weight:

■ 118 kg / 260 lbs

Aircraft application:

- ATR42
- ATR72

Options (at extra charges):

- Puncture-proof (full rubber) tires
 - → Option R3
- Revolving tow eye
 - → Option CP
- Revolving tow eye with shock absorber
 - → Option CA
- Customized color for towbar tube i.a.w.
 RAL coding scheme
 - → Option C-RAL

Documentation:

- Technical manual incl. illustrated spare parts list
- COC Certificate of Conformity
- CE Declaration of Conformity (if applicable)

Shear pins / Retaining pin:

- 00.36360.0016 "G" Push/Pull
- 00.36360.0012 "F" Torque
- 20-00480-0020-021 "G-FB" Retaining pin

Shipping information incl. packing:

Approx. Weight	Approx. shipping Dims	Approx. Volume
[kg]	[mm]	[m³]
216	3700 × 1050 × 840	3,3
[lbs]	[inch]	[ft³]
476	146 x 41 x 33	116