


J-TOWbiz2

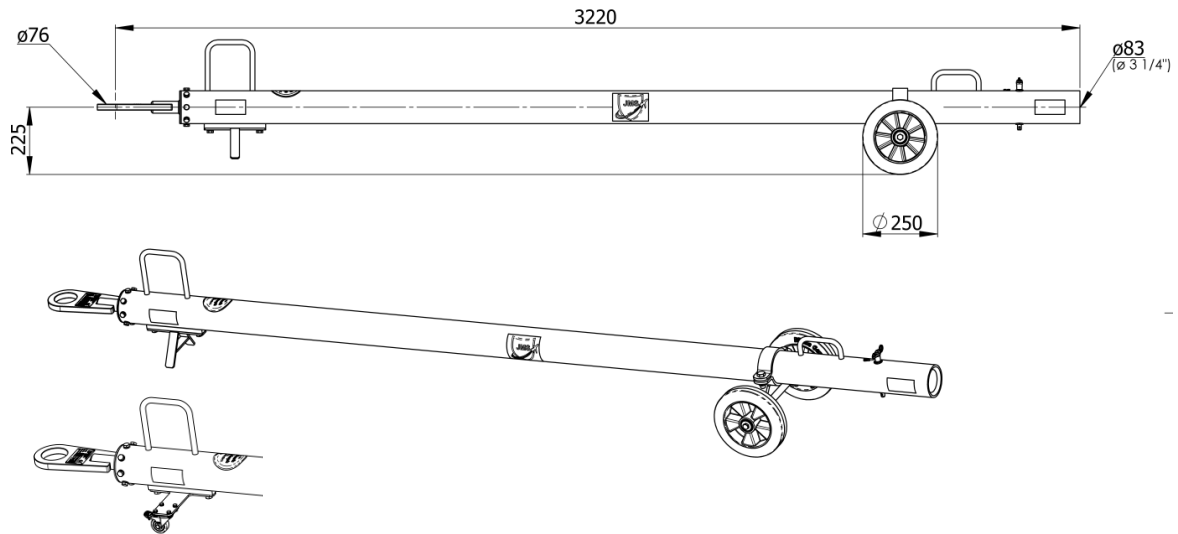

Option D/E-AC

Standard features:

- Aluminium tube
- Quick release pin for easy towhead replacement
- Undercarriage with puncture-proof tires
- Handles for safe attachment to the aircraft
- Skydrol resistant paint
- Standard color yellow RAL 1007
- Compatible to J-TOWheads of JMS D-/E-Series, but also to other universal business jet towheads using a $\varnothing 83\text{mm} / \varnothing 3\frac{1}{4}"$ tube lock system

Net weight: (for towbar without towhead)

- 42 kg / 92 lbs

Options (at extra charges):

- Adapter for using J-TOWheads with a $\varnothing 77\text{mm} / 3"$ adapter system.
 → Adapter D-E
- Revolving toweye
 → Option EP
- Revolving tow eye with shock absorber
 → Option EA
- Additional castors (lockable) on toweye side
 → Option D/E-AC
- Customized color for towbar tube i.a.w. RAL coding scheme
 → Option E-RAL

Documentation:

- Technical manual incl. illustrated spare parts list
- COC Certificate of Conformity
- CE Declaration of Conformity (if applicable)

Shipping information incl. packing: (for towbar without towhead):

Approx. Weight	Approx. shipping Dims l x w x h	Approx. Volume
[kg] 75	[mm] 3340 x 800 x 600	[m ³] 1,6
[lbs] 165	[inch] 132 x 31.5 x 23.6	[ft ³] 56.5